

Panasonic
Professional Lighting


COMMERCIAL LIGHTING _____ 03

RETAIL & HOSPITALITY LIGHTING _____ 15

INDUSTRIAL LIGHTING _____ 19

OUTDOOR LIGHTING _____ 28

COMMERCIAL LIGHTING

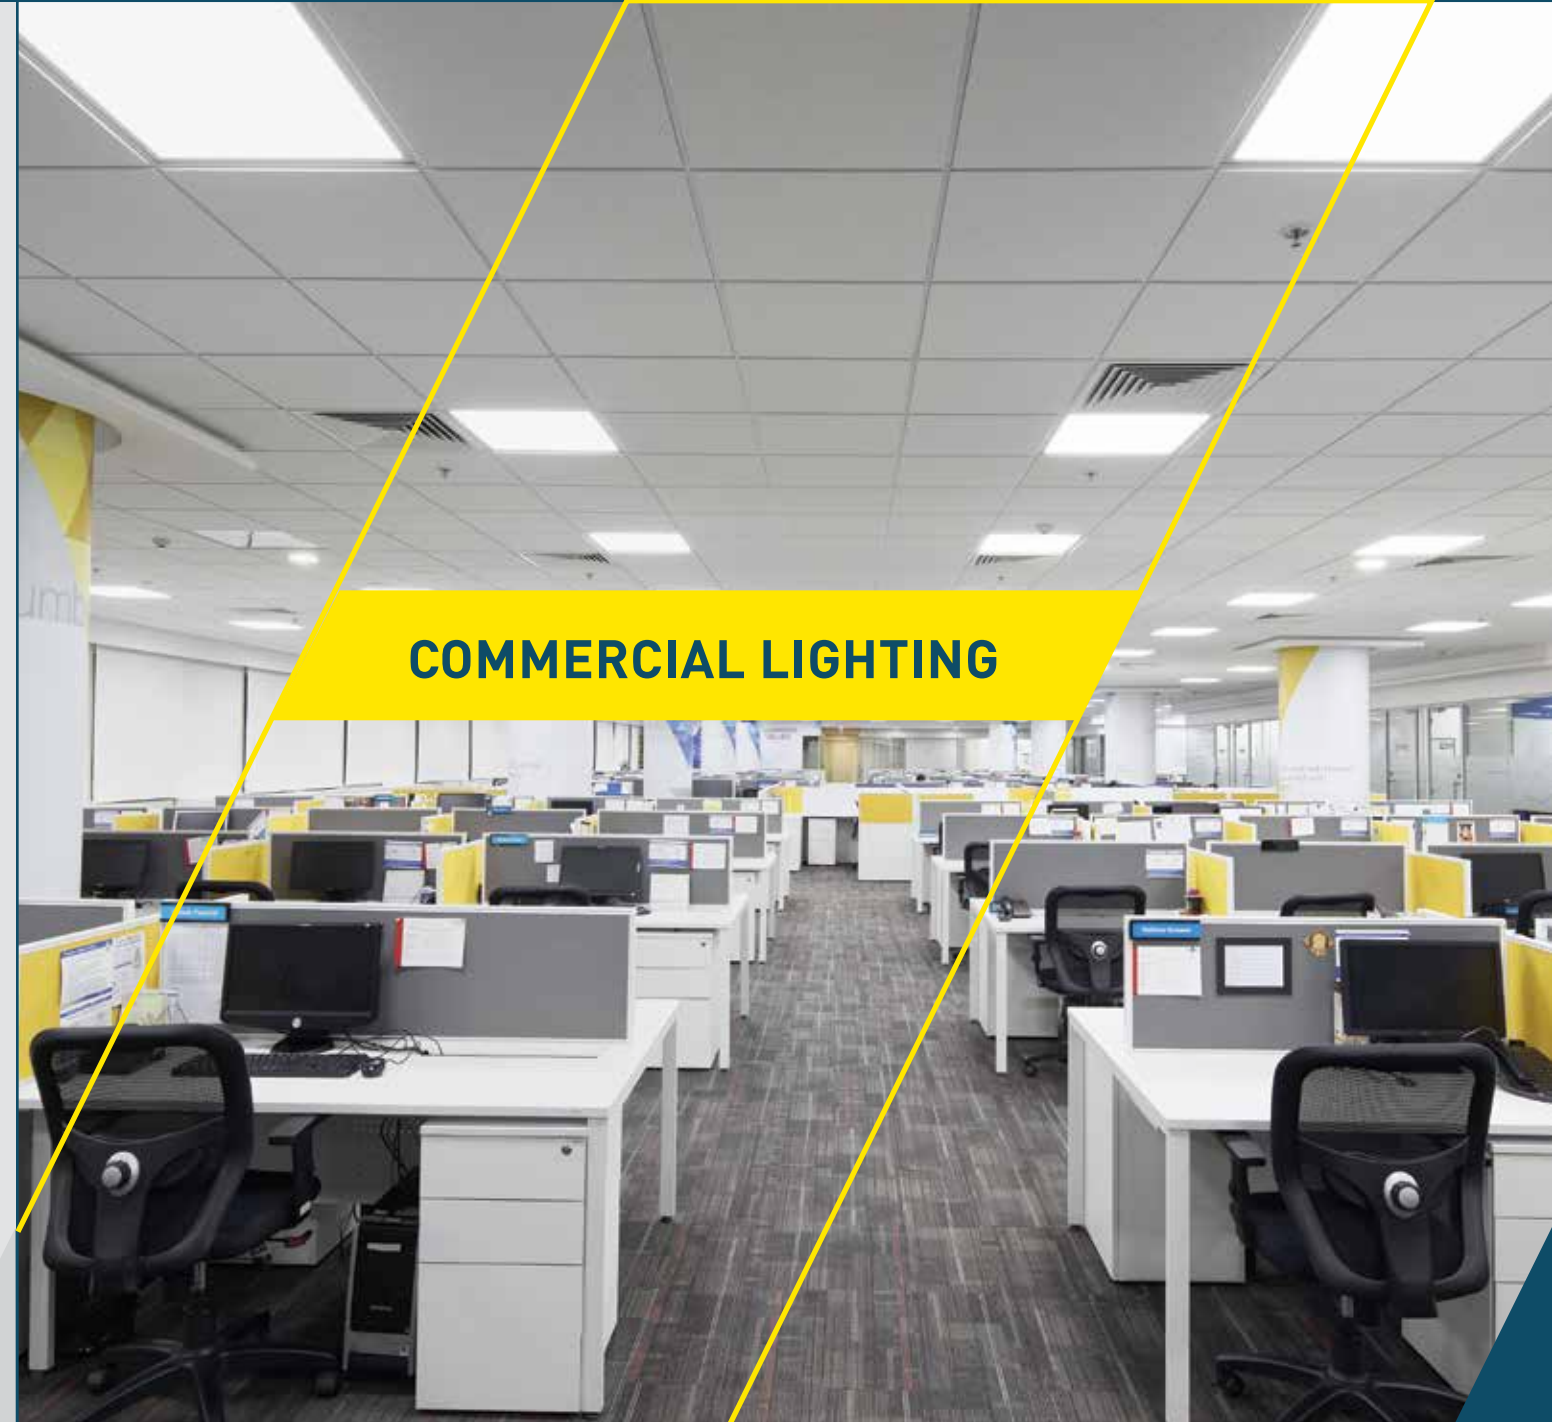

SCANTO PLUS

Deep type recess mounting LED luminaire equipped with CRCA powder coating housing , anti glare diffuser with separate energy efficient electronic driver.



Base Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
20W	4000K	PBLM05204	575 x 575	595	X	595	X	70	3750
	6500K	PBLM05207	575 x 575	595	X	595	X	70	3750
25W	4000K	PBLM11254	575 x 575	595	X	595	X	70	3715
	6500K	PBLM11257	575 x 575	595	X	595	X	70	3715
25W	4000K	PBLM05254	575 x 575	595	X	595	X	75	2900
25W	6500K	PBLM05257	575 x 575	595	X	595	X	75	2900
30W	4000K	PBLM05304	575 x 575	595	X	595	X	75	3020
30W	5700K	PBLM05308	575 x 575	595	X	595	X	75	3020
36W	4000K	PBLM01364	575 x 575	595	X	595	X	75	3540
36W	5700K	PBLM01368	575 x 575	595	X	595	X	75	3540

SCANTO

Ultra slim edge lit type recess mounting LED luminaire with extruded aluminium housing, anti glare diffuser and separate energy efficient electronic driver.




Ultra Slim Base Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
36W	4000K	PBLM09364	595 x 595	600	x	600	x	10	4050
36W	6500K	PBLM09367	595 x 595	600	x	600	x	10	4050
36W	4000K	PBLM10364	595 x 595	600	x	600	x	10	4250
36W	6500K	PBLM10367	595 x 595	600	x	600	x	10	4250

Note : PBLM10XXX with POP clip option

HEIHO

Aesthetically designed recess fixture with drop down diffuser. Fixture made of CRCA material with powder coating. Drop down PMMA diffuser used to balance Light on the ceiling & walls.



Base Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
30W	4000K	PBLM12304	575 X 575	600	X	600	X	60	6000
30W	5700K	PBLM12308	575 X 575	600	X	600	X	60	6000

SLENDO

Aesthetically designed LED linear fixture suitable for suspended down type with housing made of high quality extruded aluminium alloy including die-cast aluminium end cap. These series are also available with seamless continuous lighting system ensuring no visible dark spot or light leakages.



Suspended Linear Down Type

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
15W	4000K	PLHM01154	-	600	X	54	X	88	4000
15W	6000K	PLHM01156	-	600	X	54	X	88	4000
25W	4000K	PLHM01254	-	1200	X	54	X	88	5775
25W	6000K	PLHM01256	-	1200	X	54	X	88	5775
18W	4000K	PLHM01184	-	600	X	54	X	88	4500
18W	6000K	PLHM01186	-	600	X	54	X	88	4500
35W	4000K	PLHM01354	-	1200	X	54	X	88	6125
35W	6000K	PLHM01356	-	1200	X	54	X	88	6125
50W	4000K	PLHM01504	-	2390	X	54	X	88	9000
50W	6000K	PLHM01506	-	2390	X	54	X	88	9000

Note : 15W is Compatible with 25W & 18W is Compatible with 35W for proper uniformity.



SLENDO PLUS

Aesthetically designed LED linear fixture suitable for suspended down type with housing made of high quality extruded aluminium alloy including die-cast aluminium end cap. These series are also available with seamless continuous lighting system ensuring no visible dark spot or light leakages.




Suspended Linear Down Type

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
22W	4000K	PLHM01224	-	1200	x	54	x	88	6600
22W	5700K	PLHM01228	-	1200	x	54	x	88	6600
32W	4000K	PLHM01324	-	1200	x	54	x	88	7500
32W	5700K	PLHM01328	-	1200	x	54	x	88	7500

SLENDO

Aesthetically designed LED linear fixture suitable for suspended updown type with housing made of high quality extruded aluminium alloy including die-cast aluminium end cap. These series are also available with seamless continuous lighting system ensuring no visible dark spot or light leakages.



Suspended Linear Up Down Type

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
40W	4000K	PLHM04404	-	1200	X	54	X	88	7480
40W	6000K	PLHM04406	-	1200	X	54	X	88	7480
65W	4000K	PLHM04654	-	1200	X	54	X	88	10370
65W	6000K	PLHM04656	-	1200	X	54	X	88	10370

Aesthetically designed LED linear fixture with housing made of high quality extruded aluminium alloy including die-cast aluminium end cap. These series are also available with seamless continuous lighting system ensuring no visible dark spot or light gaps.



Recessed Linear Fixture

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
15W	4000K	PLRM01154	605 x 55	620	X	69	X	71	4000
15W	6000K	PLRM01156	605 x 55	620	X	69	X	71	4000
25W	4000K	PLRM01254	1200 x 55	1220	X	69	X	71	5610
25W	6000K	PLRM01256	1200 x 55	1220	X	69	X	71	5610
18W	4000K	PLRM01184	605 x 55	620	X	69	X	71	4500
18W	6000K	PLRM01186	605 x 55	620	X	69	X	71	4500
35W	4000K	PLRM01354	1200 x 55	1220	X	69	X	71	5950
35W	6000K	PLRM01356	1200 x 55	1220	X	69	X	71	5950

Note : 15W is Compatible with 25W & 18W is Compatible with 35W for proper uniformity.

BULWARK

Recess mounting circular LED downlight luminaire with aluminium housing in white PC finish, specially designed heat sink, anti glare diffuser and integrated energy efficient electronic driver



Aluminium Down Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
5W	3000K	PDLM03053	70	92	X	92	X	63.5	755
5W	4000K	PDLM03054	70	92	X	92	X	63.5	755
5W	6500K	PDLM03057	70	92	X	92	X	63.5	755
8W	3000K	PDLM03083	92	113	X	113	X	72.5	945
8W	4000K	PDLM03084	92	113	X	113	X	72.5	945
8W	6500K	PDLM03087	92	113	X	113	X	72.5	945
12W	3000K	PDLM03123	130	145	X	145	X	75	1130
12W	4000K	PDLM03124	130	145	X	145	X	75	1130
12W	6500K	PDLM03127	130	145	X	145	X	75	1130
14W	3000K	PDLM03143	150	174	X	174	X	78.5	1415
14W	4000K	PDLM03144	150	174	X	174	X	78.5	1415
14W	6500K	PDLM03147	150	174	X	174	X	78.5	1415
20W	3000K	PDLM03203	205	244	X	244	X	94.5	1890
20W	4000K	PDLM03204	205	244	X	244	X	94.5	1890
20W	6500K	PDLM03207	205	244	X	244	X	94.5	1890

SPUR

Recess mounting circular LED downlight luminaire with PC housing, anti-glare diffuser and separate energy efficient electronic driver.



PC Down light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
5W	3000K	PDLM12053	102	120	X	120	X	30	600
5W	4000K	PDLM12054	102	120	X	120	X	30	600
5W	6500K	PDLM12057	102	120	X	120	X	30	600
10W	3000K	PDLM12103	128	150	X	150	X	30	650
10W	4000K	PDLM12104	128	150	X	150	X	30	650
10W	6500K	PDLM12107	128	150	X	150	X	30	650
15W	3000K	PDLM12153	178	198	X	198	X	30	700
15W	4000K	PDLM12154	178	198	X	198	X	30	700
15W	6500K	PDLM12157	178	198	X	198	X	30	700
20W	3000K	PDLM12203	178	198	X	198	X	30	750
20W	4000K	PDLM12204	178	198	X	198	X	30	750
20W	6500K	PDLM12207	178	198	X	198	X	30	750

COMMERCIAL LIGHTING

NEW

BLUSH

Recess mounting circular LED downlight luminaire with aluminium housing in white PC finish, specially designed heat sink, anti glare diffuser and integrated energy efficient electronic driver



Circular Aluminium Panel Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
10W	3000K	PPAM11103P	132	145	x	145	x	25	775
10W	4000K	PPAM11104P	132	145	x	145	x	25	775
10W	6000K	PPAM11106P	132	145	x	145	x	25	775
15W	3000K	PPAM11153P	156	170	x	170	x	25	1025
15W	4000K	PPAM11154P	156	170	x	170	x	25	1025
15W	6000K	PPAM11156P	156	170	x	170	x	25	1025
20W	3000K	PPAM11203P	177	190	x	190	x	25	1250
20W	4000K	PPAM11204P	177	190	x	190	x	25	1250
20W	6000K	PPAM11206P	177	190	x	190	x	25	1250

Recess mounted slim square type LED panel with die-cast aluminium housing and smooth powder coated finish with anti-glare UV stabilized diffuser and separate energy efficient electronic driver.



Square Aluminium Panel Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
10W	3000K	PPAM12103P	132 x 132	145	x	145	x	25	775
10W	4000K	PPAM12104P	132 x 132	145	x	145	x	25	775
10W	6000K	PPAM12106P	132 x 132	145	x	145	x	25	775
15W	3000K	PPAM12153P	156 x 156	170	x	170	x	25	1025
15W	4000K	PPAM12154P	156 x 156	170	x	170	x	25	1025
15W	6000K	PPAM12156P	156 x 156	170	x	170	x	25	1025
20W	3000K	PPAM12203P	177 x 177	190	x	190	x	25	1250
20W	4000K	PPAM12204P	177 x 177	190	x	190	x	25	1250
20W	6000K	PPAM12206P	177 x 177	190	x	190	x	25	1250

COMMERCIAL LIGHTING

NEW

DISTILL

Surface mounted circular LED down light luminaire with die-cast aluminium housing in white powder coated finish, anti-glare diffuser and energy efficient electronic driver.



Circular Aluminium Down Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
10W	3000K	PDLM10103P	-	120	x	120	x	35	1050
10W	4000K	PDLM10104P	-	120	x	120	x	35	1050
10W	6000K	PDLM10106P	-	120	x	120	x	35	1050
15W	3000K	PDLM10153P	-	170	x	170	x	35	1250
15W	4000K	PDLM10154P	-	170	x	170	x	35	1250
15W	6000K	PDLM10156P	-	170	x	170	x	35	1250
20W	3000K	PDLM10203P	-	225	x	225	x	35	1750
20W	4000K	PDLM10204P	-	225	x	225	x	35	1750
20W	6000K	PDLM10206P	-	225	x	225	x	35	1750

Surface mounted square LED down light luminaire with die-cast aluminium housing in white powder coated finish, anti-glare diffuser and energy efficient electronic driver.



Square Aluminium Down Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
10W	3000K	PDLM11103P	-	120	x	120	x	35	1050
10W	4000K	PDLM11104P	-	120	x	120	x	35	1050
10W	6000K	PDLM11106P	-	120	x	120	x	35	1050
15W	3000K	PDLM11153P	-	170	x	170	x	35	1250
15W	4000K	PDLM11154P	-	170	x	170	x	35	1250
15W	6000K	PDLM11156P	-	170	x	170	x	35	1250
20W	3000K	PDLM11203P	-	225	x	225	x	35	1750
20W	4000K	PDLM11204P	-	225	x	225	x	35	1750
20W	6000K	PDLM11206P	-	225	x	225	x	35	1750

COMMERCIAL LIGHTING

NEW

SPINDLE

Circular suspended mounted LED luminaire comprises of CRCA housing matt powder coated in black. The LED clusters are assembled in the body & high efficiency translucent frosted diffuser is used for uniform glare-free light distribution.



Circular Suspended

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
25W	4000K	PDLM20254	-	300	x	300	x	85	7500
25W	5700K	PDLM20258	-	300	x	300	x	85	7500
32W	4000K	PDLM20324	-	450	x	450	x	85	8500
32W	5700K	PDLM20328	-	450	x	450	x	85	8500
42W	4000K	PDLM20424	-	600	x	600	x	95	13500
42W	5700K	PDLM20428	-	600	x	600	x	95	13500

Circular surface mounted LED luminaire comprises of CRCA housing matt powder coated in black. The LED clusters are assembled in the body & high efficiency translucent frosted diffuser is used for uniform glare-free light distribution.



Circular Surface

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
25W	4000K	PDLM21254	-	300	x	300	x	85	6500
25W	5700K	PDLM21258	-	300	x	300	x	85	6500
32W	4000K	PDLM21324	-	450	x	450	x	85	7500
32W	5700K	PDLM21328	-	450	x	450	x	85	7500
42W	4000K	PDLM21424	-	600	x	600	x	95	12500
42W	5700K	PDLM21428	-	600	x	600	x	95	12500

COMMERCIAL LIGHTING

NEW

PEAR

Cylindrical suspended mounted LED luminaire comprises of Al housing matt powder coated in black is used for modern offices, recreation area & other interiors. Special translucent PMMA diffuser used for better lighting distribution.



Cylindrical Suspended

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
12W	4000K	PDLM18124	-	102	x	102	x	200	4500
12W	5700K	PDLM18128	-	102	x	102	x	200	4500
20W	4000K	PDLM18204	-	102	x	102	x	200	6800
20W	5700K	PDLM18208	-	102	x	102	x	200	6800

Cylindrical surface mounted LED luminaire comprises of Al housing matt powder coated in black is used for modern offices, recreation area & other interiors. Special translucent PMMA diffuser used for better lighting distribution.



Cylindrical Surface

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
12W	4000K	PDLM19124	-	102	x	102	x	200	4000
12W	5700K	PDLM19128	-	102	x	102	x	200	4000
20W	4000K	PDLM19204	-	102	x	102	x	200	6300
20W	5700K	PDLM19208	-	102	x	102	x	200	6300

COMMERCIAL LIGHTING

NEW

SLENDO TECH

Recess mounting Techzone introduce a uniquely clean, simple lighting system offering continuous lighting solution for Armstrong Techzone system



Techzone

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
25	4000K	PTZM02254	1180 x 135	1190	X	145	X	100	5500
25	6500K	PTZM02257	1180 x 135	1190	X	145	X	100	5500

NEW

HARROW AL

LED batten for surface and suspended applications. Anodized extruded aluminium housing, high transmissibility diffuser with high lumen output.



Aluminium Batten

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
20W	4000K	PBTM08204	-	1185	x	20	x	32	900
20W	5700K	PBTM08208	-	1185	x	20	x	32	900
36W	4000K	PBTM08364	-	1175	x	30	x	36	1100
36W	5700K	PBTM08368	-	1175	x	30	x	36	1100

RETAIL & HOSPITALITY LIGHTING



CASK

Recess mounting circular COB LED downlight with die-cast aluminium housing in white powder coating finish, specially designed heat sink, anti glare diffuser and separate energy efficient electronic driver



COB Down Light - 24°

Wattage	CCT	Product Code	Cut Out Dimension (MM)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
3W	3000K	PDLM07033	55	68	X	68	X	66	620
3W	6500K	PDLM07037	55	68	X	68	X	66	620
7W	3000K	PDLM07073	75	85	X	85	X	62	835
7W	6500K	PDLM07077	75	85	X	85	X	62	835

Note: 4000K available on request



COB Down Light - 36°

Wattage	CCT	Product Code	Cut Out Dimension (MM)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
15W	3000K	PDLM08153	95	110	X	110	X	85	1225
15W	6500K	PDLM08157	95	110	X	110	X	85	1225

Note: 4000K available on request



COB Down Light - 60°

Wattage	CCT	Product Code	Cut Out Dimension (MM)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
15W	3000K	PDLM09153	95	110	X	110	X	85	1225
15W	6500K	PDLM09157	95	110	X	110	X	85	1225
25W	3000K	PDLM09253	125	140	X	140	X	120	2170
25W	6500K	PDLM09257	125	140	X	140	X	120	2170
30W	3000K	PDLM09303	145	160	X	160	X	125	2550
30W	6500K	PDLM09307	145	160	X	160	X	125	2550
40W	3000K	PDLM09403	160	180	X	180	X	127	3730
40W	6500K	PDLM09407	160	180	X	180	X	127	3730

Note: 4000K available on request

SLANT

Water Proof Recess mounting Circular LED Luminaire with die-cast aluminum housing in white electrophoresis finish, specially designed heat sink and separate energy efficient electronic driver.



IP65 Down Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
8W	3000K	ADL27R083	50	60	X	60	X	65	2265

ADROIT

Recess Mounting Adjustable type Circular LED Luminaire with die-cast aluminum housing in white electrophoresis finish, specially designed heat sink and separate energy efficient electronic driver.



Adjustable Down Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
28W	3000K	ADL17R283	125	125	X	125	X	154	5005
28W	4000K	ADL17R284	125	125	X	125	X	154	5005



Trimless Down Light - Adjustable

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
12W	3000K	ADL21R123	90	100	X	100	X	120	2835

ADROIT

Recess Mounting Glareless Adjustable Type Circular LED Luminaire with die-cast aluminum housing in white electrophoresis finish, specially designed heat sink and separate energy efficient electronic driver.



Trim Down Light - Adjustable

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
15W	2700K	ADL21R152	130	140	X	140	X	150	3965
15W	3000K	ADL21R153	130	140	X	140	X	150	3965

Pin Hole Adjustable Down Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
12W	3000K	ADL25R123	80	90	X	90	X	105	2835

TRACT

Aesthetically designed LED track light luminaire equipped with aluminium die-cast housing,



Track Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
10W	3000K	ATR020103	-	186	X	60	X	212	3375
10W	6000K	ATR020106	-	186	X	60	X	212	3375
20W	3000K	ATR020203	-	186	X	90	X	245	6000
20W	6000K	ATR020206	-	186	X	90	X	245	6000

Track Light Accessories

Product Code	Product Dimension					MRP ₹
	L/Dia	X	W/Dia	X	H	
ATR02R000	1000	X	35	X	15	1600
ATR02S000	1000	X	65	X	15	1400

INDUSTRIAL LIGHTING


NEW
XINIA

Aesthetically designed robust and reliable linear LED luminaire with specially designed heat sink and reliable non-integrated IP 65 energy efficient electronic driver. IP 65 linear highbay , provide a highly productive and safe environment to increase work efficiency.



Linear Highbay Light - 60°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
90W	5700K	PBYM07908	-	490	X	80	X	123	16500
120W	5700K	PBYM07CD8	-	730	X	80	X	123	22000
150W	5700K	PBYM07FG8	-	970	X	80	X	123	27500
180W	5700K	PBYM07KL8	-	970	X	80	X	123	33000



Linear Highbay Light - 90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
90W	5700K	PBYM08908	-	490	X	80	X	123	16500
120W	5700K	PBYM08CD8	-	730	X	80	X	123	22000
150W	5700K	PBYM08FG8	-	970	X	80	X	123	27500
180W	5700K	PBYM08KL8	-	970	X	80	X	123	33000

NEW
ENVISO PLUS

Aesthetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requirement across Industrial application.



Circular Bay Light - 60°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
80W	5700K	PBYM09808	-	318.5	X	318.5	X	171	11900
100W	5700K	PBYM09AB8	-	318.5	X	318.5	X	171	13200
120W	5700K	PBYM09CD8	-	318.5	X	318.5	X	171	16500
150W	5700K	PBYM09FG8	-	318.5	X	318.5	X	171	17900
180W	5700K	PBYM09KL8	-	318.5	X	318.5	X	171	19600



Circular Bay Light - 90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
80W	5700K	PBYM10808	-	318.5	X	318.5	X	171	11900
100W	5700K	PBYM10AB8	-	318.5	X	318.5	X	171	13200
120W	5700K	PBYM10CD8	-	318.5	X	318.5	X	171	16500
150W	5700K	PBYM10FG8	-	318.5	X	318.5	X	171	17900
180W	5700K	PBYM10KL8	-	318.5	X	318.5	X	171	19600



ENVISO

Aesthetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requiment across Industrial application.



Circular Bay Light 60°/90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
60W	5700K	PBYM11608	-	200	x	200	x	162	9500
60W	5700K	PBYM12608	-	200	x	200	x	162	9500



Circular Bay Light 60°/90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
80W	5700K	PBYM11808	-	252	x	252	x	155	11500
80W	5700K	PBYM12808	-	252	x	252	x	155	11500
100W	5700K	PBYM11AB8	-	252	x	252	x	155	12500
100W	5700K	PBYM12AB8	-	252	x	252	x	155	12500
120W	5700K	PBYM11CD8	-	252	x	252	x	155	14500
120W	5700K	PBYM12CD8	-	252	x	252	x	155	14500



Circular Bay Light 60°/90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
150W	5700K	PBYM11FG8	-	298	x	298	x	156	17500
150W	5700K	PBYM12FG8	-	298	x	298	x	156	17500
180W	5700K	PBYM11KL8	-	298	x	298	x	162	21500
180W	5700K	PBYM12KL8	-	298	x	298	x	162	21500

Note : PBYM11XXX (60° Beam Angle) and PBYM12XXX (90° Beam Angle)

ENVISO DOM

Ascetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient electronic driver to meet the different lighting requirement across industrial application with IP65.



Circular High Bay - 60°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
90W	4000K	PBYM01904	-	345	X	-	X	384	12285
90W	6500K	PBYM01907	-	345	X	-	X	384	12285
120W	4000K	PBYM01CD4	-	345	X	-	X	384	15120
120W	6500K	PBYM01CD7	-	345	X	-	X	384	15120
150W	4000K	PBYM01FG4	-	345	X	-	X	413	18900
150W	6500K	PBYM01FG7	-	345	X	-	X	413	18900
180W	4000K	PBYM01KL4	-	345	X	-	X	463	23150
180W	6500K	PBYM01KL7	-	345	X	-	X	463	23150

Note: 3000K available on request



Circular High Bay - 90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
90W	4000K	PBYM02904	-	345	X	-	X	384	12285
90W	6500K	PBYM02907	-	345	X	-	X	384	12285
120W	4000K	PBYM02CD4	-	345	X	-	X	384	15120
120W	6500K	PBYM02CD7	-	345	X	-	X	384	15120
150W	4000K	PBYM02FG4	-	345	X	-	X	413	18900
150W	6500K	PBYM02FG7	-	345	X	-	X	413	18900
180W	4000K	PBYM02KL4	-	345	X	-	X	463	23150
180W	6500K	PBYM02KL7	-	345	X	-	X	463	23150

Note: 3000K available on request

ENVISO MOD

Aesthetically designed robust LED high bay light, equipped with specially designed heat sink and reliable non-integrated energy efficient electronic driver to meet the different lighting requirement across industrial application suitable for easy replacement of conventional HID lamps.



Modular High Bay Light 60°/90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
50W	6500K	PBYM04507	-	355	X	80	X	265	10000
50W	6500K	PBYM05507	-	355	X	80	X	265	10000



Modular High Bay Light 60°/90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
90W	6500K	PBYM04907	-	355	X	162	X	265	14000
90W	6500K	PBYM05907	-	355	X	162	X	265	14000
120W	6500K	PBYM04CD7	-	355	X	162	X	265	17000
120W	6500K	PBYM05CD7	-	355	X	162	X	265	17000



Modular High Bay Light 60°/90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
150W	6500K	PBYM04FG7	-	355	X	250	X	265	22000
150W	6500K	PBYM05FG7	-	355	X	250	X	265	22000
180W	6500K	PBYM04KL7	-	355	X	250	X	265	26500
180W	6500K	PBYM05KL7	-	355	X	250	X	265	26500



IMBUE


IP 54, dust free & Zero maintenance LED Clean Room Bottom opening luminarie with CRCA powered coating housing, anti glare diffuser with potentiometric integrated energy efficient electronic driver.



Cleanroom Bottom Opening

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
45W	4000K	PCRM01454	576 x 575	655	X	600	X	75	6950
45W	5700K	PCRM01458	575 x 575	655	X	600	X	75	6950
60W	4000K	PCRM01604	578 x 575	655	X	600	X	75	8750
60W	5700K	PCRM01608	577 x 575	655	X	600	X	75	8750

IP 65, dust free & Zero maintenance LED Clean Room Top opening luminarie with CRCA powered coating housing, anti glare diffuser with potentiometric integrated energy efficient electronic driver.



Cleanroom Top Opening

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
45W	5700K	PCRM02458	570 x 570	600	X	600	X	75	On Request
45W	4700K	PCRM02454	570 x 570	600	X	600	X	75	On Request
60W	5700K	PCRM02608	570 x 570	600	X	600	X	75	On Request
60W	4700K	PCRM02604	570 x 570	600	X	600	X	75	On Request

Note : IP65 from front after installation

HARROW

LED batten for surface and suspended application. White powder coated CRCA housing with LEDs. Seamless front frame is with white high transmission acrylic cover and decorative end cap.



Industrial Batten - IP20

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
20W	4000K	PBTM12204	-	1200	x	42	x	56	2500
20W	5700K	PBTM12208	-	1200	x	42	x	56	2500
40W	4000K	PBTM12404	-	1200	x	42	x	56	3500
40W	5700K	PBTM12408	-	1200	x	42	x	56	3500

TRUSS

LED Batten with inbuilt heat sink, polycarbonate housing equipped with anti-glare diffuser & energy efficient electronics driver



Industrial Batten - IP65

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
20W	4000K	PBTM05204	-	1140	X	75	X	70	3530
20W	6500K	PBTM05207	-	1140	X	75	X	70	3530
40W	4000K	PBTM05404	-	1140	X	75	X	70	4460
40W	6500K	PBTM05407	-	1140	X	75	X	70	4460

NEW

CANO

LED Under Canopy luminaire aesthetically designed with better thermal management. Housing made of PDC and frame with toughened glass. This LED luminaire is designed to replace conventional under canopy applications. It is also recommended for Industrial application.



NEW

MERLIN

Aesthetically designed robust LED well glass, equipped with specially designed heat sink and reliable integrated energy efficient electronic driver to meet the different lighting requirement across industrial application, suitable for easy replacement of conventional HID lamps.



Under Canopy

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
80W	5700K	PCNM01808	293 X 275	324	x	305	x	60	11600

Well Glass

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
24W	5700K	PWGM06248	-	145	x	145	x	140	4100
35W	5700K	PWGM06358	-	145	x	145	x	140	4500
70W	5700K	PWGM06708	-	200	x	200	x	205	8100
24W	5700K	PWGM07248	-	145	x	145	x	140	4100
35W	5700K	PWGM07358	-	145	x	145	x	140	4500
70W	5700K	PWGM07708	-	200	x	200	x	205	8100

Note : PWMG07XXX with milky diffuser


ELLIPTO

Ceiling and Wall mount LED bulk head serves as an excellent energy efficient alternative to CFL/ incandescent bulkhead luminaires.



Bulk Head

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
10W	6500K	PBHM01107	-	232	X	105	X	50	1225
Note: 3000K available on request									

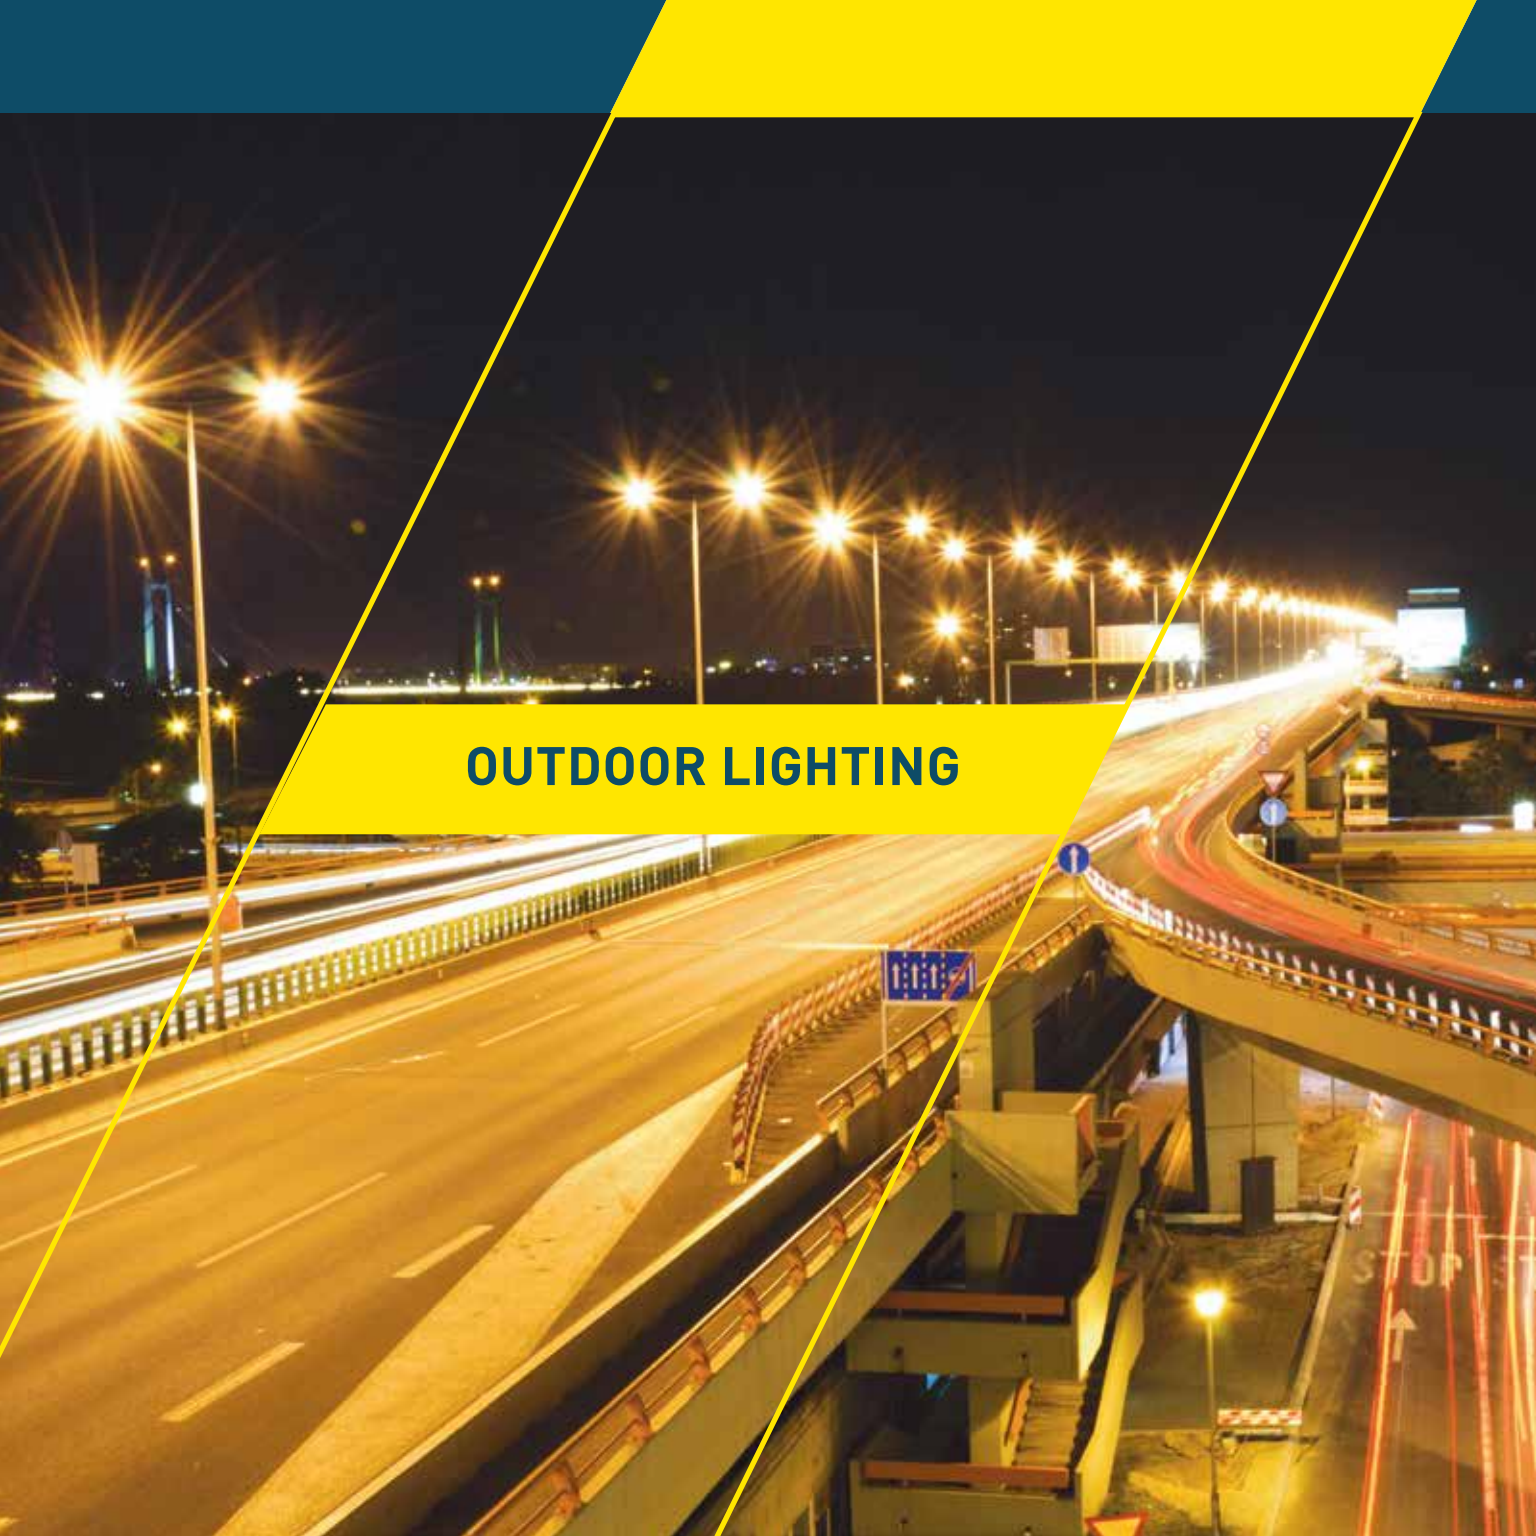

OUTDOOR LIGHTING

OUTDOOR LIGHTING

NEW

BLOOM

LED Street Light with innovative & aesthetic & robust design with aluminium heat sink and toughened glass (IP66)



Street Light

Wattage	CCT	Product Code	Pole Outer Dia	Cut Out Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
20W	5700K	PSTM16208	-	320	x	95	x	65	2350
30W	5700K	PSTM16308	-	320	x	95	x	65	2450
45W	5700K	PSTM16458	-	320	x	125	x	85	4350



Street Light

Wattage	CCT	Product Code	Pole Outer Dia	Cut Out Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
60W	5700K	PSTM16608	50	375	x	144	x	108	7500
70W	5700K	PSTM16708	50	427	x	211	x	111	8500
90W	5700K	PSTM16908	50	427	x	211	x	111	10500



Street Light

Wattage	CCT	Product Code	Pole Outer Dia	Cut Out Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
120W	5700K	PSTM16CD8	55	486	x	237	x	116	13500
150W	5700K	PSTM16FG8	60	556	x	262	x	116	15500
180W	5700K	PSTM16KL8	60	556	x	262	x	116	18500
200W	5700K	PSTM16MN8	60	577	x	292	x	130	20500
220W	5700K	PSTM16OP8	60	577	x	292	x	130	22500
250W	5700K	PSTM16RS8	60	625	x	320	x	125	25500

OUTDOOR LIGHTING

NEW

FLANO

Ascetically designed LED Flood Light Lumianire equipped with specially designed heat sink, reliable integrated energy efficient electronic driver, suitable for easy replacement of conventional flood light.



Flood Light 90°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
30W	5700K	PFLM11308	-	217	x	177	x	41	4200
50W	5700K	PFLM11508	-	242	x	231	x	53	5500
70W	5700K	PFLM11708	-	283	x	265	x	60	9000
90W	5700K	PFLM11908	-	283	x	265	x	60	9500
100W	5700K	PFLM11AB8	-	283	x	265	x	60	10500
120W	5700K	PFLM11CD8	-	314	x	309	x	60	12500
150W	5700K	PFLM11FG8	-	335	x	330	x	62	15500
180W	5700K	PFLM11KL8	-	384	x	383	x	65	18500
200W	5700K	PFLM11MN8	-	384	x	383	x	65	20500

Ascetically designed LED Flood Light Lumianire equipped with specially designed heat sink, reliable integrated energy efficient electronic driver, suitable for easy replacement of conventional flood light.



Flood Light 60°

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
120W	5700K	PFLM10CD8	-	217	x	177	x	41	12500
150W	5700K	PFLM10FG8	-	242	x	231	x	53	15500
180W	5700K	PFLM10KL8	-	283	x	265	x	60	18500
200W	5700K	PFLM10MN8	-	283	x	265	x	60	20500
240W	5700K	PFLM10QR8	-	283	x	265	x	60	24500
300W	5700K	PFLM10WX8	-	314	x	309	x	60	30500
350W	5700K	PFLM10ZC8	-	335	x	330	x	62	35500
400W	5700K	PFLM10ZH8	-	384	x	383	x	65	40500

OUTDOOR LIGHTING

GLEBE

Decorative, Robust and reliable LED post Top with aluminum housing offers uniform Light distribution, high durability and IP65 Protection.



LED Post Top

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
25W	3000K	APT010253	-	450	X	442	X	495	30000
25W	4000K	APT010254	-	450	X	442	X	495	30000
40W	3000K	APT010403	-	450	X	442	X	495	38000
40W	4000K	APT010404	-	450	X	442	X	495	38000

DRUPE

Decorative & cylindrical shape LED Bollard Light with integrated LED Driver offers comfortable softlight, high durability & IP65.



Bollard Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
6W	3000K	ABD010063	-	90	X	90	X	800	10000
6W	4000K	ABD010064	-	90	X	90	X	800	10000
6W	6000K	ABD010066	-	90	X	90	X	800	10000

POME

Stylish, Robust, reliable spike Light/ Bush Light with aluminum housing offers uniform light distribution with IP65 Protection suitable to provide accent lighting for verity of application.



LED Spike

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
6W	3000K	ASK010063	-	60	X	113	X	322	5000
6W	6000K	ASK010066	-	60	X	113	X	322	5000
6W	Red	ASK01006R	-	60	X	113	X	322	5000
6W	Green	ASK01006G	-	60	X	113	X	322	5000
6W	Amber	ASK01006A	-	60	X	113	X	322	5000

MOOR

Robust and reliable LED step Light with aluminum housing offers uniform light distribution, high durability and IP65 Protection



Step Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
3W	4000K	ASE010034	58 x 114.8	127	X	70	X	50.5	3000
3W	6000K	ASE010036	58 x 114.8	127	X	70	X	50.5	3000

COVET

Surface mounted decorative LED Up Down light with aluminum housing offers uniform light distribution with IP65 protection suitable for wall mount application.



LED Up Down - Square

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
4W	3000K	AUD010043	-	84	X	70	X	180	7500
4W	4000K	AUD010044	-	84	X	70	X	180	7500
4W	6000K	AUD010046	-	84	X	70	X	180	7500

Surface mounted decorative LED Up Down light with aluminum housing offers uniform light distribution with IP65 protection suitable for wall mount application.



LED Up Down - Circular

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
6W	3000K	AUD020063	-	60	X	60	X	110	8000
6W	4000K	AUD020064	-	60	X	60	X	110	8000
6W	6000K	AUD020066	-	60	X	60	X	110	8000

GRAZE

Stylish, robust & reliable In-Ground light with aluminum housing offers uniform light distribution with IP67.



In-Ground Light

Wattage	CCT	Product Code	Cut Out Dimension (mm)	Product Dimension (mm)					MRP (₹)
				L/Dia	X	W/Dia	X	H	
3W	3000K	AGL010033	90	115	X	115	X	175	6500
3W	6000K	AGL010036	90	115	X	115	X	175	6500
3W	Red	AGL01003R	90	115	X	115	X	175	6500
3W	Green	AGL01003G	90	115	X	115	X	175	6500
3W	Amber	AGL01003A	90	115	X	115	X	175	6500
9W	3000K	AGL010093	140	160	X	160	X	190	9500
9W	6000K	AGL010096	140	160	X	160	X	190	9500
9W	Red	AGL01009R	140	160	X	160	X	190	9500
9W	Green	AGL01009G	140	160	X	160	X	190	9500
9W	Amber	AGL01009A	140	160	X	160	X	190	9500
18W	3000K	AGL010183	140	160	X	160	X	190	11500
18W	6000K	AGL010186	140	160	X	160	X	190	11500
18W	Red	AGL01018R	140	160	X	160	X	190	11500
18W	Green	AGL01018G	140	160	X	160	X	190	11500
18W	Amber	AGL01018A	140	160	X	160	X	190	11500

HEAD/REGIONAL OFFICES

WEST (H.O.)

Panasonic Life Solutions India Pvt. Ltd.
3rd Floor, B Wing, I-Think Techno Campus,
Pokhran Road No. 2, Thane (W),Thane - 400 607
Maharashtra Tel: 022 30418888

NORTH-1

Panasonic Life Solutions India Pvt. Ltd.
SCO-40, 1st Floor, NAC Manimajra,
Chandigarh - 160101 Tel - 0172 3255715

STATE/SALES OFFICES

NORTH-1

JAMMU
Panasonic Life Solutions India Pvt. Ltd.
85/1, 1st Floor, Trikuta Nagar,
Jammu - 180 012 Tel: 0191 2470735 / 36

CHANDIGARH

Panasonic Life Solutions India Pvt. Ltd.
S.C,0 - 40 1st floor , NAC Manimajra,
Chandigarh -160101.

NORTH-2

JAIPUR
Panasonic Life Solutions India Pvt. Ltd.
224-225, 2nd Floor, Ganpati Plaza,
M.I. Road, Jaipur, Rajasthan - 302 001
Tel: 0141 3007666 / 2331369

NEW DELHI

Panasonic Life Solutions India Pvt. Ltd.
6th Floor, Plot No-7,TDI Centre,
Jasola District Centre,New Delhi-110025.

EAST

GUWAHATI
Panasonic Life Solutions India Pvt. Ltd.
2A, 2nd Floor, Dihang Arcade,
ABC, G.S. Road, Guwahati, Pin-781005.

BHUBANESWAR

Panasonic Life Solutions India Pvt. Ltd.
2nd Floor, Creative Plaza,
Rasulgarh Square,
Bhubaneswar-751010. Odisha..

EAST

Panasonic Life Solutions India Pvt. Ltd.
4th Floor, Block " C ", Apeejay House,
15, Park Street, Kolkata, West Bengal - 700 016
Tel: 033 32219196

NORTH-2

Panasonic Life Solutions India Pvt. Ltd.
6th Floor, TDI Centre, Jasola District,
New Delhi - 110 025 Tel: 011 46006400

PUNJAB

Panasonic Life Solutions India Pvt. Ltd.
B-20/ 2813 / 13-A, 3rd Floor, Ranjit Tower,
Pakhowal Road , Gurdev Nagar,
Ludhiana - 141001 (Punjab) Tel: 0161 4630796

PARWANOO

Panasonic Life Solutions India Pvt. Ltd.
S.C,0 - 40 1st floor , NAC Manimajra,
Chandigarh -160101.

LUCKNOW

Panasonic Life Solutions India Pvt. Ltd.
1st Floor, Tiwari Puram No. 1,
Main Kanpur Road, Nr. Hind Petrol Pump,
Opp. UCO Bank, Lucknow - 226023.

FARIDABAD

Panasonic Life Solutions India Pvt. Ltd.
6th Floor, Plot No-7,TDI Centre,
Jasola District Centre,New Delhi-110025.

PATNA

Panasonic Life Solutions India Pvt. Ltd.
F-1, 1st Floor, Gitanjali Palace,
Jamal Road, Patna, Bihar - 800001.

SILIGURI

Panasonic Life Solutions India Pvt. Ltd.
1st Floor, Hanshara House,
Beside City Mall (Bazar Kolkata),
Sevoke Road, Siliguri - 734001.

SOUTH

Panasonic Life Solutions India Pvt. Ltd.
No. 8-12, 3rd Floor, Prestige Nebula -II,
Infantry Road, Bengaluru, Karnataka - 560 001
Tel: 080 30284400 - 40

UTTARAKHAND

Panasonic Life Solutions India Pvt. Ltd.
Khasra No: 332-333-335 & 339, 1st Floor,
Main Saharanpur Road, Niranjapur,
Opp. Institute of Hotel Management, HCL Compound,
Dehradun - 248 001 Tel: 0135 3241686

VARANASI

Panasonic Life Solutions India Pvt. Ltd.
P.N.204,H.No.C-27/274 A-3,S-1,
2nd Floor Dr.Jai Singh Building,
Maldahiya, Varanasi.

GHAZIABAD

Panasonic Life Solutions India Pvt. Ltd.
6th Floor, Plot No-7,TDI Centre,
Jasola District Centre,New Delhi-110025.

RANCHI

Panasonic Life Solutions India Pvt. Ltd.
Office No.:-509 , R.R. TOWER , 5th Floor ,
Opposite Akashwani (Near New Market Chowk) ,
Ratu Road , Ranchi :-834001.

WEST

RAIPUR

Panasonic Life Solutions India Pvt. Ltd.
316-317 A To E, 3rd Floor,
Ravi Bhawan, Jaistambh Chowk,
Raipur C.G.- 492001.

SURAT

Panasonic Life Solutions India Pvt. Ltd.
403, 4th Floor, Union Trade Center,
B/s. Apple Hospital, Udhna Darwaja,
Ring Road, Surat, Gujarat. 395002.
Ph. 261-3002009.

LOHAR CHAWL

Panasonic Life Solutions India Pvt. Ltd.
C-369/482,2, Tak Wadi,
Kalbadevi Road, Mumbai-400002.

SOUTH

HUBLI

Panasonic Life Solutions India Pvt. Ltd.
A/122-146, 2nd Floor, Mahalaxmi
Mansion, Above Axis Bank,
New Cotton Market, Deshpande
Nagar, Hubli - 580 029
Tel: 0836 3296694

COCHIN

Panasonic Life Solutions India Pvt. Ltd.
K P Varkey & Madathiparambil
Complex, 1st Floor,
Door No. 35/1085D,
Palarivattom, Cochin -25.

GOA

Panasonic Life Solutions India Pvt. Ltd.
Office No 403, 4th Floor,
Gera Emporium II, Patto - Panaji,
Goa, 403001.

BHOPAL

Panasonic Life Solutions India Pvt. Ltd.
Plot No-r30,2nd Floor,
Manya Arcade, Zone-2,
MP Nagar, Bhopal-462011.

NAGPUR

Panasonic Life Solutions India Pvt. Ltd.
Tapsya,1st Floor, Near Rahate
Hospital, Adamsha Chowk,
C.A.Road, Nagpur-440008.

CHENNAI

Panasonic Life Solutions India Pvt. Ltd.
123,124, Level 3, Isphani Centre,
Nungambakkam High Road.
Chennai 600 034.

COIMBATORE

Panasonic Life Solutions India Pvt. Ltd.
Balavasantha Complex,
3rd Floor,No:1,
Bharathi Park Cross Road,
Off. NSR Road, Saibaba Colony.
Coimbatore-641 011.

AHMEDABAD

Panasonic Life Solutions India Pvt. Ltd.
405, 4ff,3rd Eye One Complex,
Opp Honest Restaurant,
Panchvati C.G. Road, Ahmedabad,
Gujarat - 380006.

INDORE

Panasonic Life Solutions India Pvt. Ltd.
318, D.M. Tower, 21/1,
Race Course Road,
Indore - 452001.

PUNE

Panasonic Life Solutions India Pvt. Ltd.
The 5th Avenue, 4th Floor, Office A & B ,
Dhole Road, Near Desai Bros Building,
Pune -411001.

VIJAYAWADA

Panasonic Life Solutions India Pvt. Ltd.
#39-10-5, 2nd Floor, V.N.R.Towers,
Opp: Water Tank,Labbipet,
Vijayawada - 520010.

HYDERABAD

Panasonic Life Solutions India Pvt. Ltd.
#1-8-384/385, Gowra Grand,
Ground Floor, SP Road, Begumpet,
Secunderabad - 500 003.

Terms & Conditions:

¥ All prices are subject to general terms and conditions of our business ¥ MRP prices are inclusive of local taxes /VAT and excise duty at the prevailing rates. Prices are subject to change without prior notice ¥ This price list supersedes all our previous price lists. If any dispute should arise, it will be subject to Mumbai jurisdiction ¥ Due to continuous improvements in product design and development and manufacturing methods, the product may differ in some respects from the details provided herein. Current details should therefore be checked with the company



Panasonic Life Solutions India Pvt. Ltd.

3rd Floor, B Wing, I-Think Techno Campus,
Pokharan Road No. 2,

Thane (W), Thane - 400 607, Maharashtra.

Tel.:022-42228888 | WhatsApp: 9136028606

Fax: 022-42228884

Customer Care No: 022- 41304130

Email: wecare@in.panasonic.com

Web site: www.lsin.panasonic.com